

ANALOG ELCB TESTER



1810 EL


FEATURES

- Taut Band movement.
- Simple operation.
- Wiring check.
- Robust.
- Can be used on 2 wires L-E (ELCB/RCCB/GFCI tester).
- Can be used on 3 wires L-E-N (with wiring check).
- No batteries.
- Sense automatically 50 or 60Hz.
- Current injected in phase with the voltage.
- Other voltage optional (110V).
- EN 50081-1 EN50082-1

SPECIFICATIONS

Current Settings	10-50mA@230Vac
Current Selection	Knob
Frequency of Operation	50/60 Hz Sinusoidal
Over-Temperature Protection	NO
Operating Voltage (L-E)	230 Vac $\pm 15\%$
Meter Accuracy	$\pm 1\%$ of full scale
Protection	Fused(200mA 250V)
Operating Temperature	-5°C to 45°C
Storage Temperature	-10°C to 85°C
Battery	None
Dimensions	170(L) x 165(W) x 92(D)mm
Weight	730g Approx.
Accessories	Test leads Shoulder belt Instruction manual

Test Leads Connections

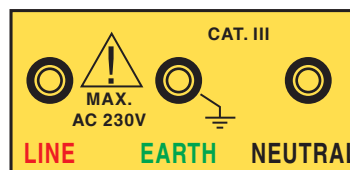

TOP TRONIC DESIGN
 ORIGINAL CIRCUITRY, SCHEMATICS,
 PRINTED CIRCUIT BOARDS, L.C.D.,
 USER'S MANUAL, FACIA LABELS,
 SOFTWARE, CALIBRATION PROCEDURES,
 ENCLOSURE & CASE DESIGN, LEAFLET,
 INSTRUCTION LABELS, PART LABELS.
1810EL